# NRSE Series

SMD Shielded Tiny Power Inductor
Size 4018

**CHARACTERISTICS**

- 
- 

**APPLICATION**

- 
- 

## Dimensions: [mm]

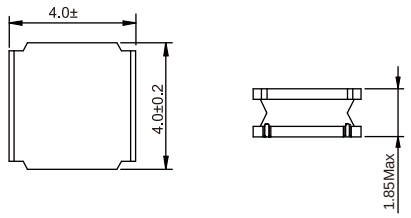


## Land Pattern: [mm]




## Electrical Properties:

| Part No | Inductance @100KHz/0.25V (μH) | Tolerance | Satura on Current (A) | Temperature Rise Current (A) | DCR ±30% (mΩ) |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com